


5. Откройте файл прошивки (File-Import Image) и нажмите "start".



6. Зажмите кнопку сброса внутри AV-порта (скрепкой например) и не отпускайте до обнаружения приставки компьютером.

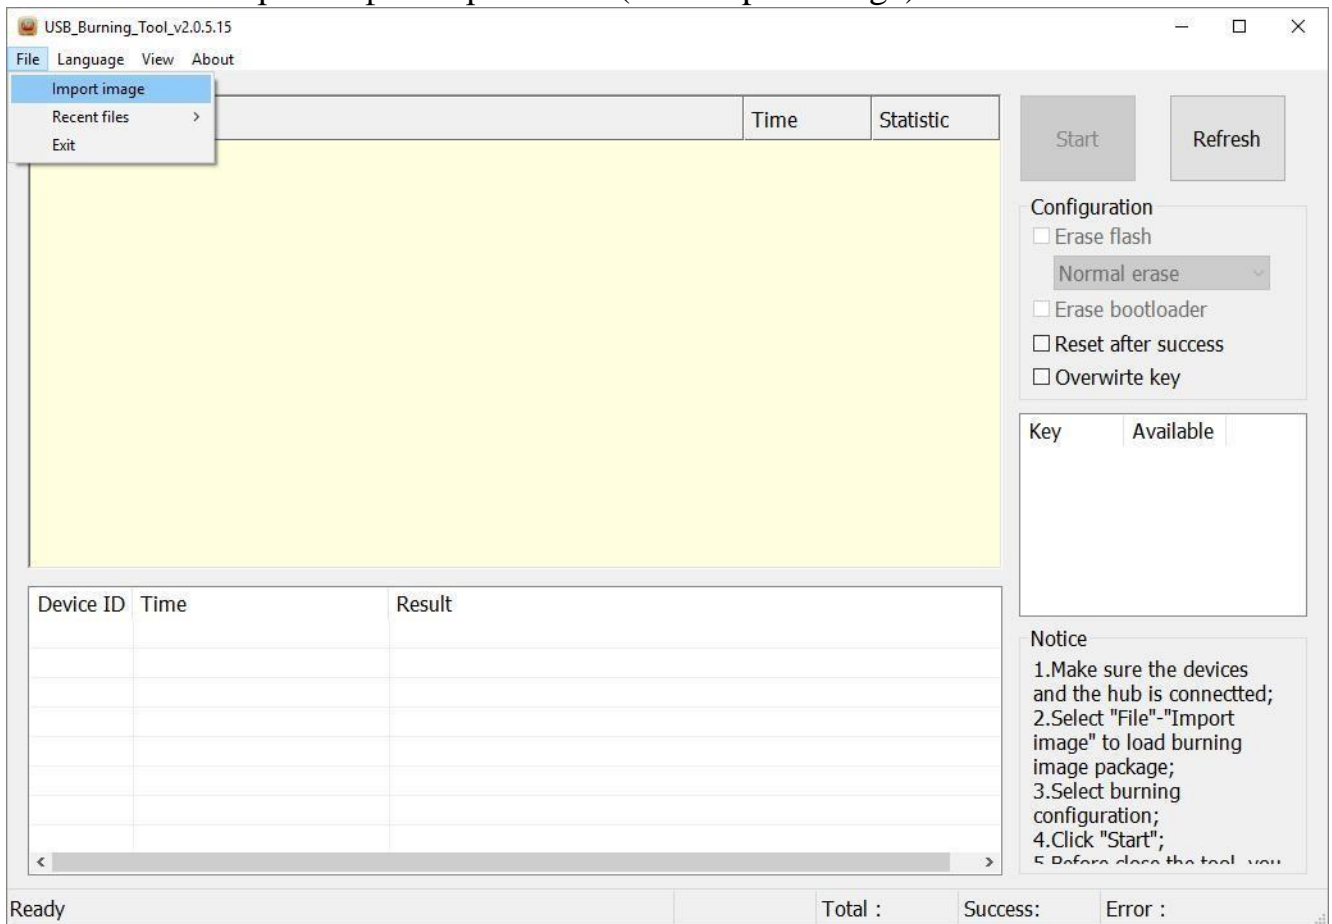

7. Подключите устройство к компьютеру через OTG USB кабель к порту USB2. Устройство включится автоматически.



8. Когда компьютер обнаружит устройство, перепрошивка начнется автоматически. Если этого не произошло, проверьте установлены ли драйвера amlogic в диспетчере устройств и повторите их установку.

USB_Burning_Tool_v2.0.5.15

File Language View About

Device ID	Status	Time	Statistic
HUB2-1			
HUB2-2	22%:Download system	27	
HUB2-3			
HUB2-4			
HUB2-5			
HUB2-6			

Stop Refresh

Configuration

- Erase flash
- Normal erase
- Erase bootloader
- Reset after success
- Overwrite key

Key Available

Notice

1. Make sure the devices and the hub is connected;
2. Select "File"->"Import image" to load burning image package;
3. Select burning configuration;
4. Click "Start";
5. Before close the tool, you

C:\Users\Isaac\Desktop\амлоджик\aml_upgrade_package.img 687,605 KB Total : Success: Error :

9. После перепрошивки устройства вы увидите сообщение “result: burning successful”, после чего нажмите "stop".

The screenshot shows the USB_Burning_Tool_v2.0.5.15 application window. The main interface features a table with columns for Device ID, Status, Time, and Statistic. The row for HUB2-2 is highlighted in green, indicating a successful burn. To the right of the table are 'Stop' and 'Refresh' buttons. Below the main table is a 'Configuration' panel with checkboxes for 'Erase flash', 'Erase bootloader', 'Reset after success', and 'Overwrite key'. A 'Key' table is also present. At the bottom, a 'Notice' section provides instructions. The status bar at the very bottom shows the file path, size, and progress statistics.

Device ID	Status	Time	Statistic
HUB2-1			
HUB2-2	100%:Burning successfully	2:03	0/1
HUB2-3			
HUB2-4			
HUB2-5			
HUB2-6			

Device ID	Time	Result
HUB2-2	2016-02-19 18:05:24 585	[0x00000000]Burning successfully

C:\Users\Isaac\Desktop\амлоджик\aml_upgrade_package.img 687,605 KB Total :1 Success:1 Error :0

10. Отключите устройство от компьютера.